
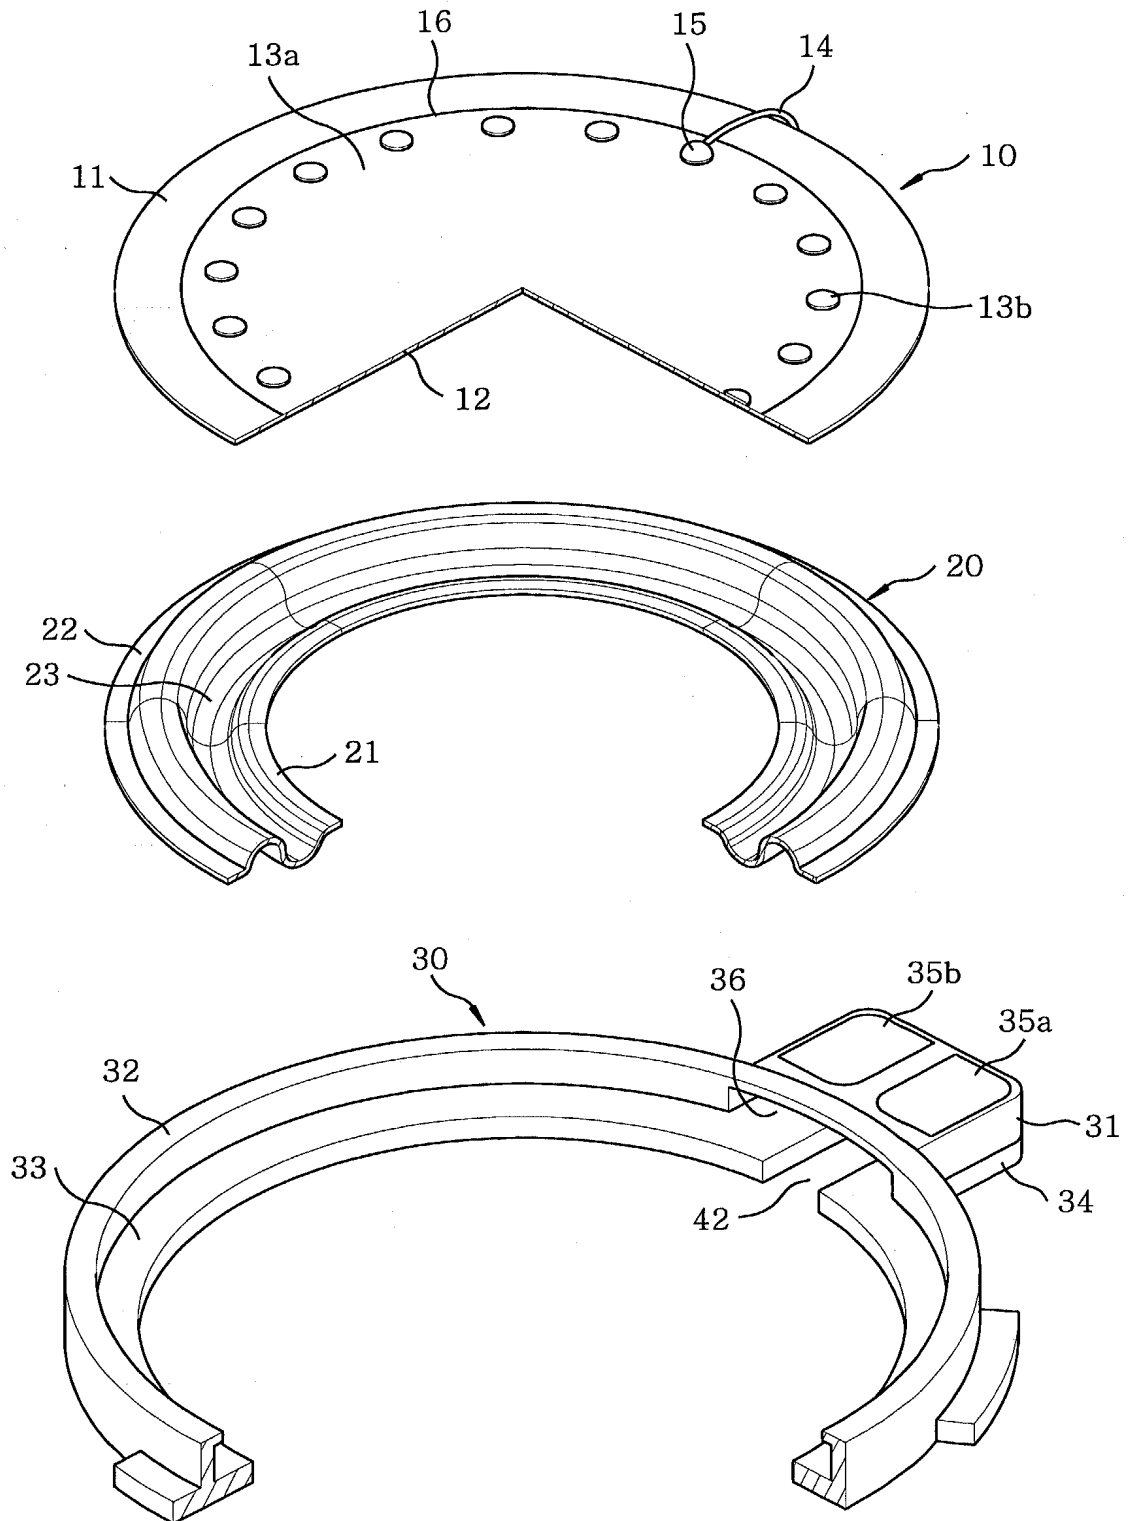


FIG. 1

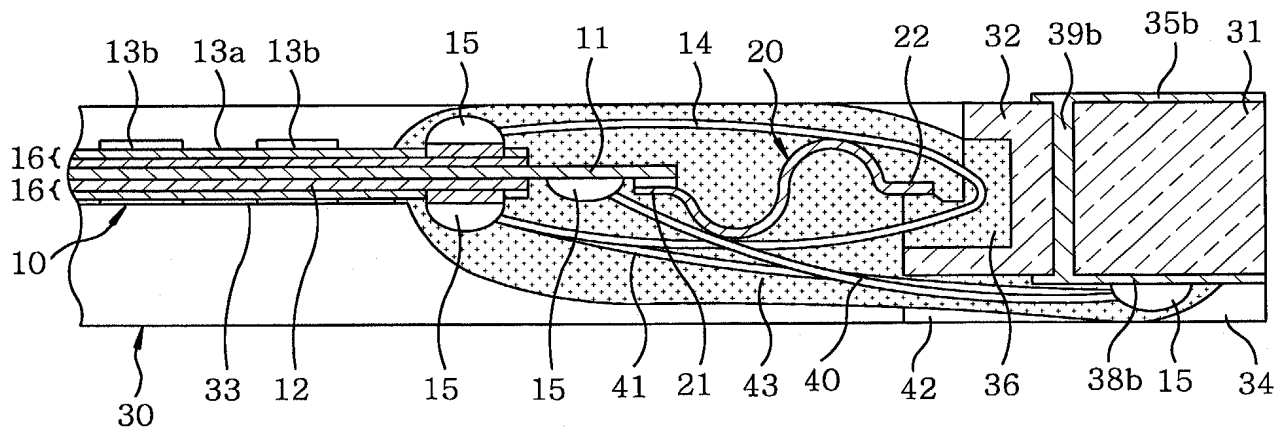

[illegible]

A perspective view of a circular device assembly. The assembly includes a central circular component (10) surrounded by a ring (20). The ring (20) has a series of small circular features (13a) around its inner circumference and larger circular features (13b) around its outer circumference. A bracket (30) indicates the entire assembly. On the right side, there are two rectangular components (35a and 35b) mounted on a base (31). A curved arm (14) connects the ring (20) to the base (31), featuring a small circular feature (15) at its end. A label (43) points to the junction where the arm meets the ring.

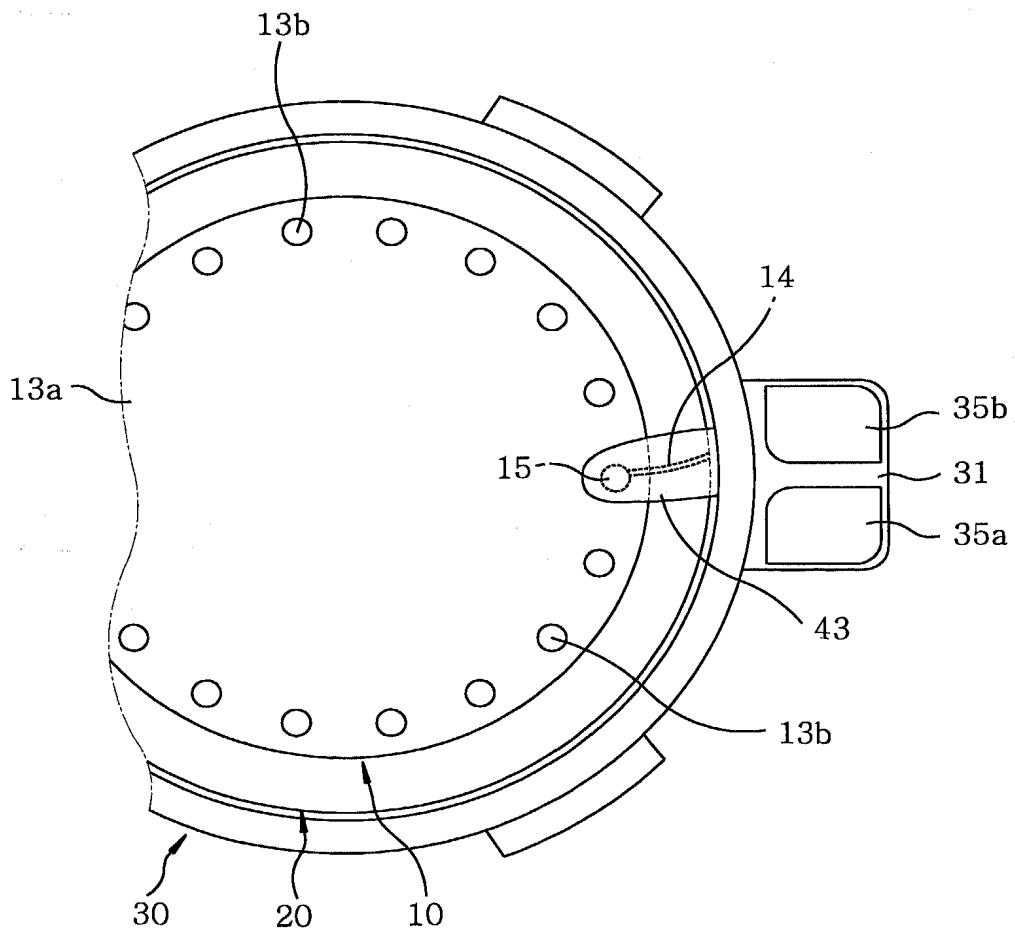


FIG. 4

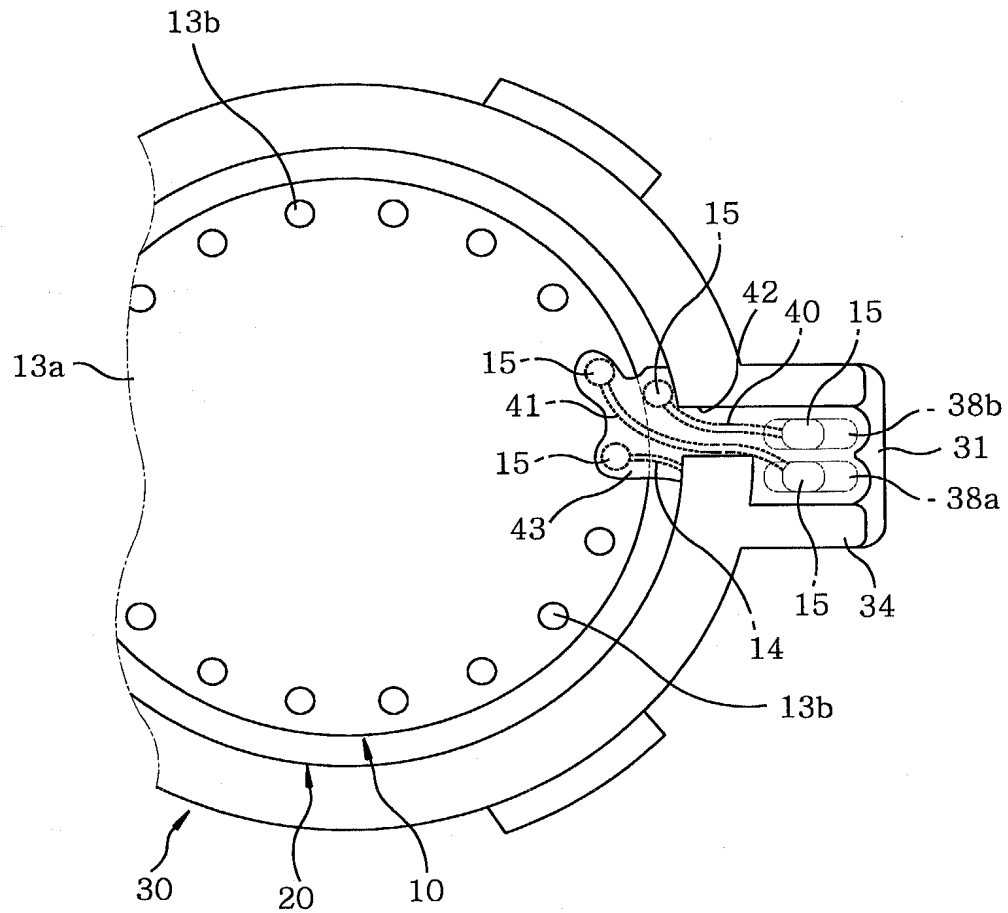


FIG. 5

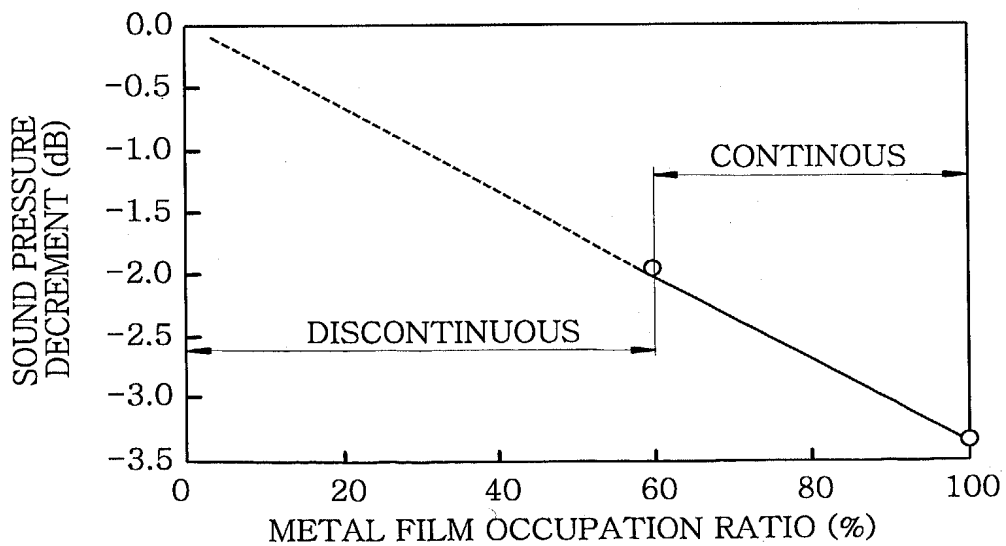


FIG. 6


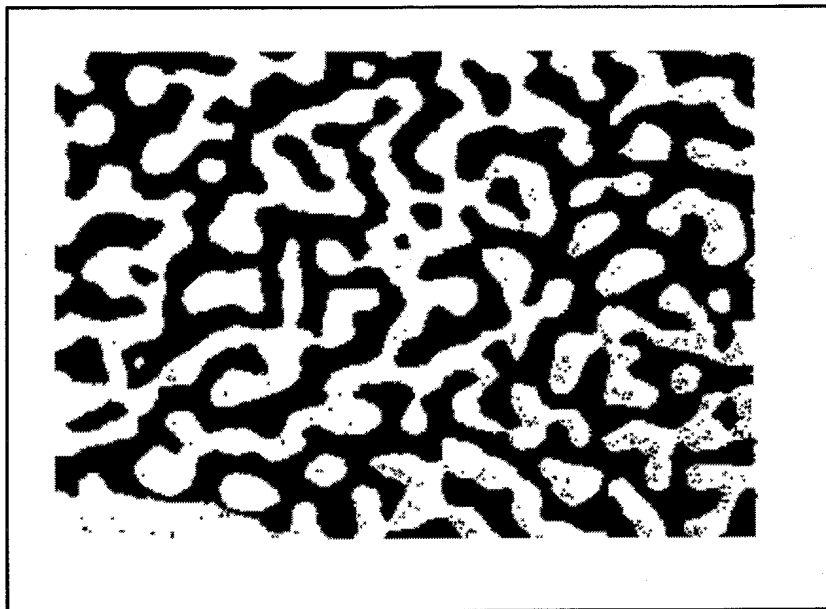


FIG. 7

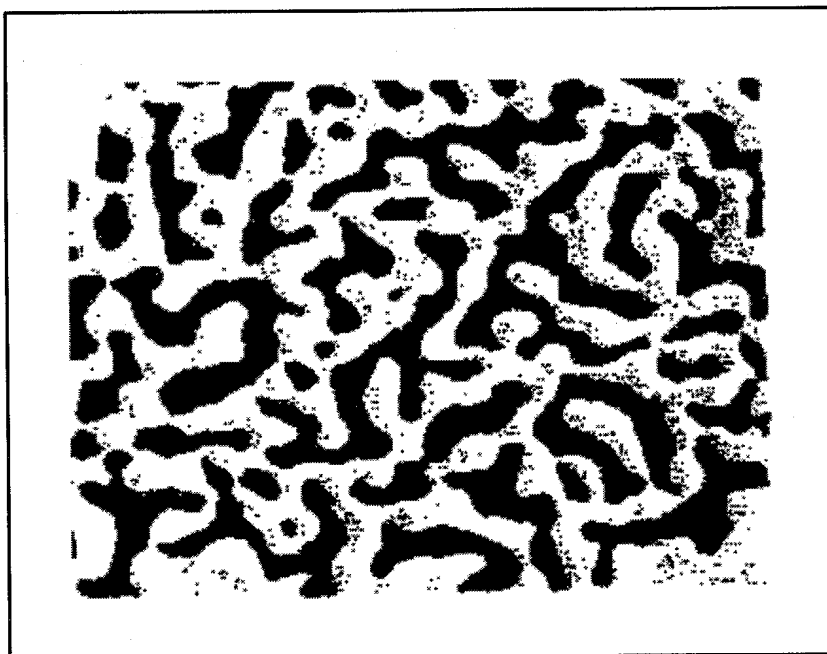

1005512-013902

FIG. 8


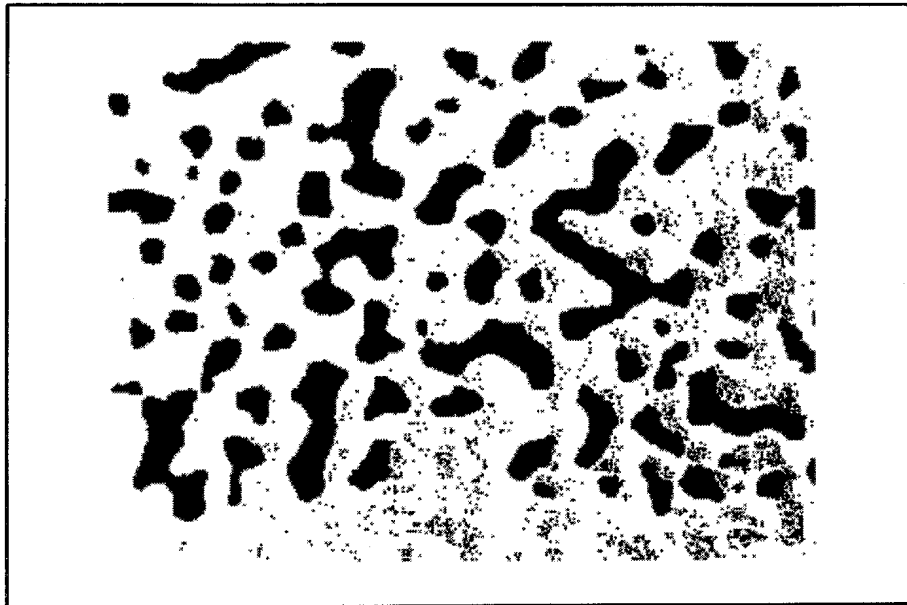


FIG. 9



40564-9-91002

FIG. 10

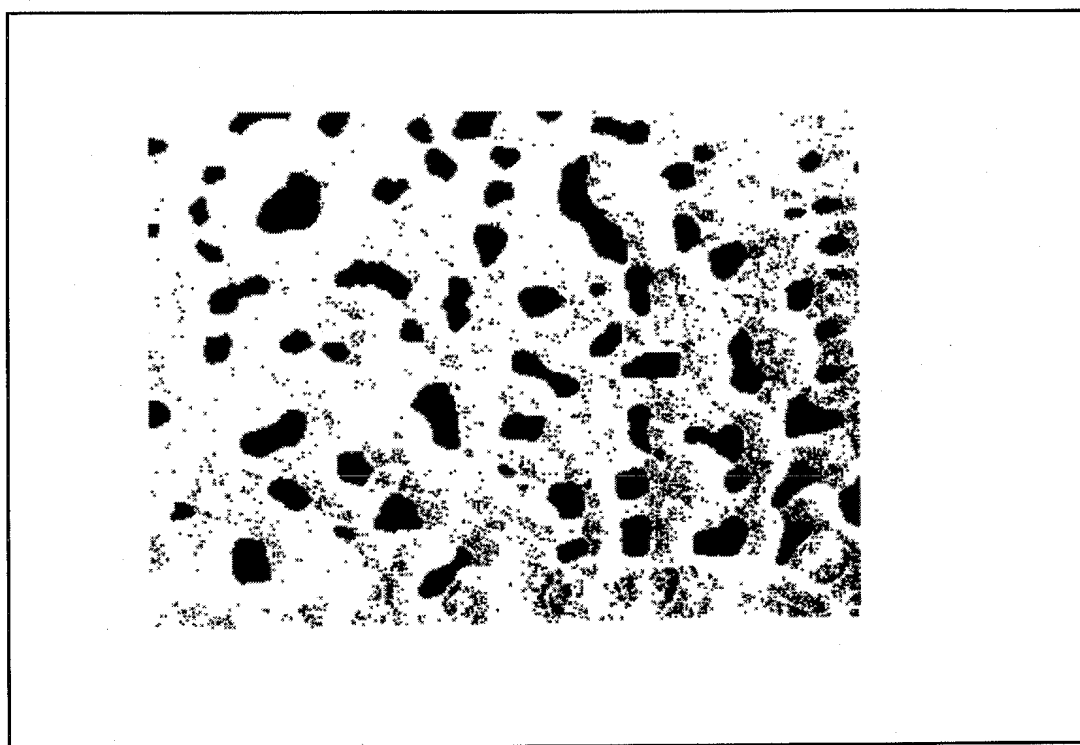

1005443 04302

FIG. 11

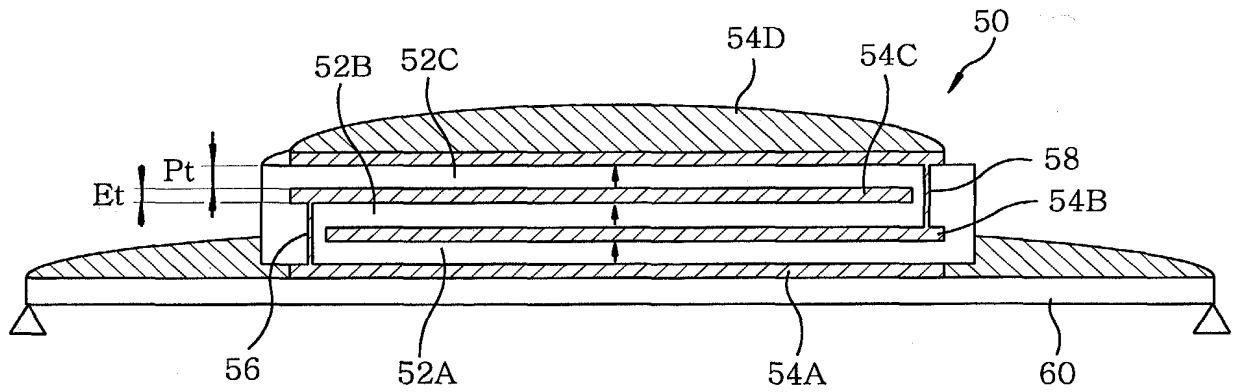


FIG. 12A

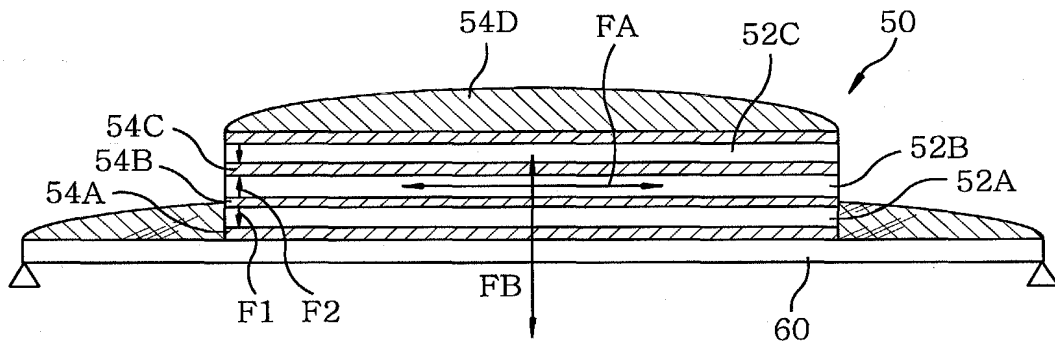


FIG. 12B

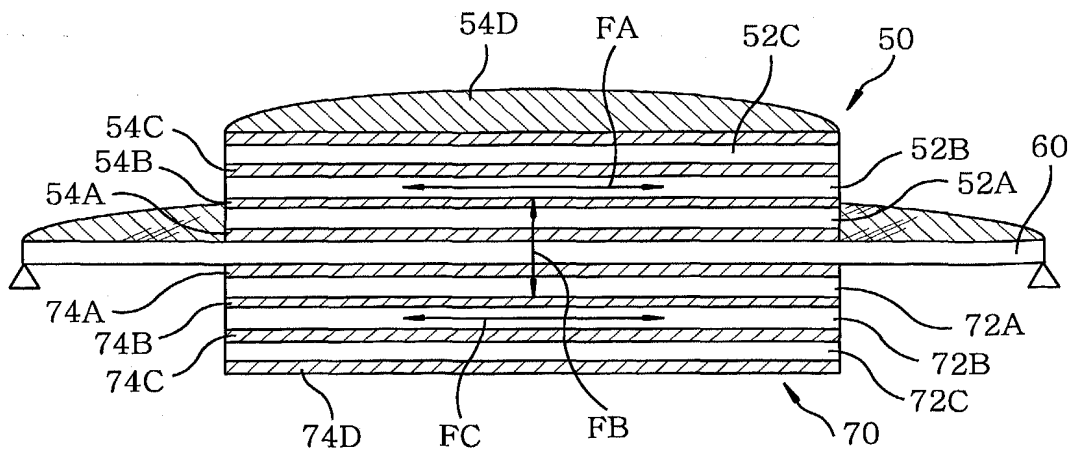


FIG. 13

